


NFRC Energy Star Performance Chart

The below chart contains the results of our most recent NFRC Thermal Data Testing. Northeast is partnered with independent agency ALI & Intertek Labs to provide accurate test reports and information for all our products. The below records are updated as products are re-tested and renewed. Downloadable Test Reports & Explanations of each category can be found on our “Ratings” Page on our website. It is the responsibility of the owner, architect, or builder to make sure the product selected is in compliance with applicable laws & building codes.

MODEL	CPD #	THERMAL VALUES (U-Factor)			SOLAR HEAT GAIN COEFFICIENT			VISIBLE TRANSMITTANCE			AIR LEAKAGE
		CLEAR	LOW-E	LOW-E WITH FOAM	CLEAR	LOW-E NO GRID	LOW-E WITH GRID	CLEAR	LOW-E NO GRID	LOW-E WITH GRID	
DH100	NEW-A-1		0.29			0.37			0.53		≤0.3
DH900	NEW-A-2		0.28	0.26		0.37	0.24		0.52	0.44	≤0.3
DH990	NEW-A-3		0.28			0.35			0.48		≤0.3
SL4011 (SL710)	NEW-A-19		0.28			0.36			0.50		≤0.3
PW4015 (PW330)	NEW-A-22		0.27			0.31			0.58		≤0.3
CW300	NEW-A-24		0.27			0.24			0.44		≤0.3
CW390	NEW-A-16		0.25			0.24			0.44		≤0.3
SH660	NEW-A-13		0.28			0.38			0.54		≤0.3
SL610											≤0.3
PW630											≤0.3
PD400	NEW-A-23		0.3			0.36			0.49		≤0.3

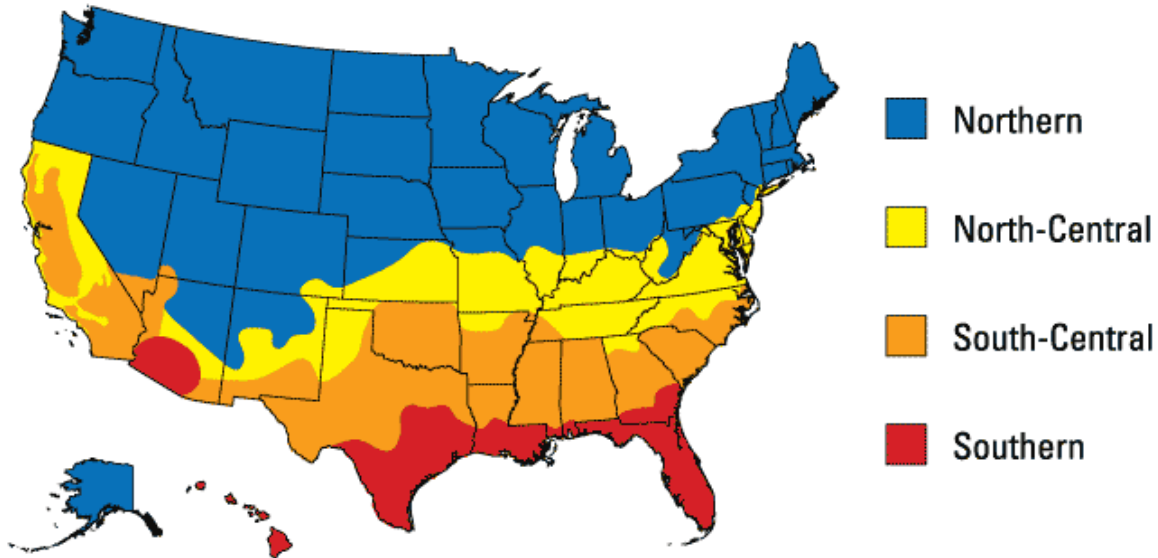

WINDOWS			
CLIMATE ZONE	U-FACTOR ¹	SHGC ²	
Northern	≤0.27	Any	Prescriptive
	=0.28	≥0.32	Equivalent Energy Performance
	=0.29	≥0.37	
	=0.30	≥0.42	
North Central	≤ 0.30	≤ 0.40	
South Central	≤ 0.30	≤ 0.25	
Southern	≤ 0.40	≤ 0.25	

SKYLIGHTS			
CLIMATE ZONE	U-FACTOR ¹	SHGC ²	
Northern	≤ 0.50	Any	
North Central	≤ 0.53	≤ 0.35	
South Central	≤ 0.53	≤ 0.28	
Southern	≤ 0.60	≤ 0.28	

Air Leakage ≤ 0.3 cfm/ft2

¹ Btu/h ft²·F
² Solar Heat Gain Coefficient