

THE CW390 SERIES - CASEMENT




 **North
East**
WINDOWS USA, INC.

FAMILY MADE IN AMERICA SINCE 1947

STANDARD FEATURES

- 3 1/4" Frame Depth
- Custom Sizing To The Nearest 1/4"
- Flat Exterior Sash For Design
- Replacement, New Construction Or Integral 2 1/2" Flat Casing
- Euro White, Almond, Bronze, Black, 2-Tone Lami Black
- Fusion Welded Frame & Sashes
- Maintenance Free Multi-Chambered Vinyl Profiles
- Multi Point Locking System
- Fold-In Operator & Locking Handle
- Heavy Duty Hinges For Windows Wider Than 30"
- Heavy Duty Weatherstripping For Air & Water Performance
- Snap-In Glazing Beads For Easy Glass Replacement
- 7/8" Overall Insulated Glass Unit
- High Performance Warm Edge Spacer System
- Standard Full Screen - Roll Formed Aluminum Frame
- Fiberglass Screen Mesh
- Accessory Groves For Easy Zero Degree Mulling
- Continuous Frame For Muller Units
- AAMA Gold Label Standard
- Limited Lifetime Warranty!

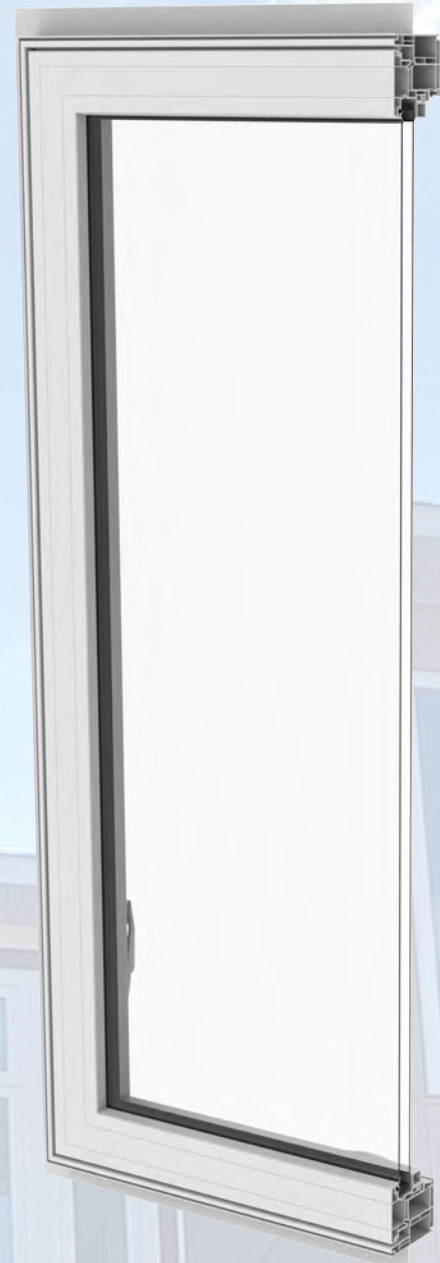

CONFIGURATIONS

- 1 LITE
- 2 LITE
- 3 LITE - EQUAL
- 3 LITE - 25-50-25
- 4-LITE
- 5-LITE
- 6-LITE



WINDOW + DOOR
TOP 100
MANUFACTURERS



NFRC RATINGS

GLASS CONFIGURATION	FOAM	U-FACTOR	SHGC	VT
CLEAR (SS)/AIR/CLEAR (SS)	NO	0.40	0.53/0.48	0.55/0.49
CLEAR (DS)/AIR/CLEAR (DS)	NO	0.40	0.52/0.47	0.54/0.49
E270 LOWE (SS)/ARG90/CLEAR (SS)	NO	0.26	0.25/0.23	0.46/0.42
E270 LOWE (DS)/ARG90/CLEAR (DS)	NO	0.26	0.25/0.22	0.46/0.41
E270 LOWE (SS)/ARG90/CLEAR (SS)	YES	0.25	0.25/0.23	0.46/0.42
E270 LOWE (DS)/ARG90/CLEAR (DS)	YES	0.24	0.25/0.22	0.46/0.41
E270 LOWE (DS)/ARG90/CS73P (DS)	YES	0.21	0.23/0.21	0.43/0.39
E180 LOWE (DS)/ARG90/CS73P (DS)	YES	0.22	0.40/0.37	0.49/0.44

MAKE SIZES

MIN. WIDTH	16"
MAX. WIDTH	36"
MULLED UNIT REQUIRED W > 36"	
MIN. HEIGHT	18"
MAX. HEIGHT	78"
TRANSOM REQUIRED H > 78"	
MIN. EGRESS W	30"
MIN. EGRESS H	44"

AAMA RATINGS

Performance	LC-PG50
Air	<.01 @ 1.57 PSF
Water Resistance	7.52 PSF
Uniform Structural Load	75 PSF
Uniform Design Load	50 PSF
Forced Entry	Grade 10
Status	Gold Label

CW390
AVAILABLE OPTIONS